



FPT
INDUSTRIAL
MARINE
PLEASURE

**Our efficiency.
Your edge.**



FPT
INDUSTRIAL
MARINE
PLEASURE

**Our efficiency.
Your edge.**

ABOUT FPT INDUSTRIAL

FPT Industrial is the Brand of CNH Industrial dedicated to the development, production, sale and assistance of powertrains for Marine, On Road, Off Road, and Power Generation applications.

The company employs over 8,000 people worldwide, within ten plants and seven R&D Centers. The FPT Industrial sales network consists of 73 dealers and more than 800 service centers around 100 countries. A wide product offering, including six engine ranges from 42 hp up to 1,006 hp, transmissions with maximum torque of 200 Nm up to 500 Nm, front and rear axles from 2 to 32 ton GAW (Gross Axle Weight). FPT Industrial offers the most complete Natural Gas engines line-up on the market for industrial applications, including engine ranges from 136 hp up to 460 hp. This extensive offer and a close focus on R&D activities make FPT Industrial a world leader in industrial powertrains.

We work for businesses serving other businesses, and we are committed to satisfy the requirements of both direct and final Customers.

We are proud to be an innovation-driven Company, that builds Customer advantage through continuous research and improvement, and creates value by leveraging this advantage.

Today FPT Industrial is one of the leading world players in engines, axles and transmissions for the Industrial sector, ranking among the first four manufacturers worldwide in the 2- to 20-liter Diesel engine segment.

THE WAVE OF INNOVATION

FPT Industrial's engines for pleasure and commercial boats stand out for superb quality, features and application versatility. They bring maximum and continuous specific power and torque at low revolutions. They achieve better efficiency in all sea conditions. They also boast an impressive durability.

A dramatic reduction of noise and vibrations combines power with sailing pleasure. Exhaust emissions have been cut down too, lowering environmental impact and complying with the most stringent legislation.

Our engineering experience has delivered a lightweight design, with low volume/power and weight/power ratios, for easier installation and superior performance.

Superior Technology & Outstanding Advantages

Performance

Maximum and continuous high specific power. High torque at low revs. Lightness (weight/power low ratios).

Flexibility

Compactness (volume/power low ratios). Full range of accessories available. Wide range of emission and propulsion certifications. Keel cooling versions availability.

Low Environmental Impact

Drastic reduction of exhaust emissions.
Low noise and vibrations.

Low Operating Costs

Lower fuel consumption.
Longer maintenance intervals costs.
Longer overhaul intervals.

Marine Emission Regulations

IMO

kW	HP	2017	2018	2019	2020	2021
>130	>174	Tier II (Tier III ECA areas only)				

The International Maritime Organization (IMO) regulates exhaust emissions on diesel engines above 130kW (174 hp). Engines used exclusively in emergency applications are exempt. IMO Tier III applies only when operating within a NOx Emission Control Area. The Tier III regulation is in effect for North America and US Caribbean Sea NOx ECA's for vessels built after January 1, 2016.

EU

kW	HP	2017	2018	2019	2020	2021
19-299	25-401	Stage IIIA		Stage V		
>299	>401	Stage IIIA			Stage V	
Pleasure		RCD 2				

The Nonroad Mobile Machinery Directive regulates exhaust emissions from diesel engines installed on inland waterway vessels operating in the EU. The RCReational Craft Directive regulates noise and exhaust emissions from propulsion engines installed on rCReational craft operating in the EU.

US EPA

kW	HP	2017	2018	2019	2020	2021
<600	<805	Tier 3				
≥600	≥805	Tier 4				

The United States Environmental Protection Agency (EPA) regulates exhaust emissions from diesel engines installed on US flagged/registered marine vessels.

Marine Rating Classification

Full load reference conditions

Reference	ISO3046
Ambient pressure (kPa):	100
Ambient temperature (°C):	25
Relative humidity (%):	30
Fuel density (kg/dm ³):	0.84
Fuel calorific value (kJ/kg):	42700
Fuel temperature (°C):	40

Rating classification

Definition

Rating	Service	Definition
A1	Short range fast pleasure service	Limited to 10% of time Cruising speed at engine rpm <90% of calibration rated speed 300 h/y
A2/B1	Long range pleasure/commercial service	Limited to 10% of time Cruising speed at engine rpm <90% of calibration rated speed 1000 h/y
B	Light duty	Limited to 10% of time Cruising speed at engine rpm <90% of calibration rated speed 1500 h/y
C	Medium duty	Limited to 25% of time Cruising speed at engine rpm <90% of calibration rated speed 1500/3000 h/y
D	Heavy duty	up to 100% of time unlimited h/y
S1	Sport duty	up to 80% of time Remaining 20% of time at low idle or manoeuvring at low speed 100 h/y

Marine Engine Commercial Naming




Definition

Engine Family	F1 Series NEF Series Cursor Series	S N C
Engine Displacement*	F1 & NEF Series Cursor Series	Displacement (Lt) x 10 F1 3 Lt = 30 Displacement (Lt) Cursor 15.9 Lt = 16
Maximum Power**	Rating A1/A2 Maximum engine Power (HP) Rating D Maximum engine Continuous Power (HP)	
Emissions	E = EU Emissions N = NAFTA Emissions	

*Displacement >10l – Litres; Displacement <10l - litres x 10
 ** Pleasure: Max engine Power (metric HP)
 Commercial: Max engine Continuous Power (metric HP)

Marine Engine Technical Identification

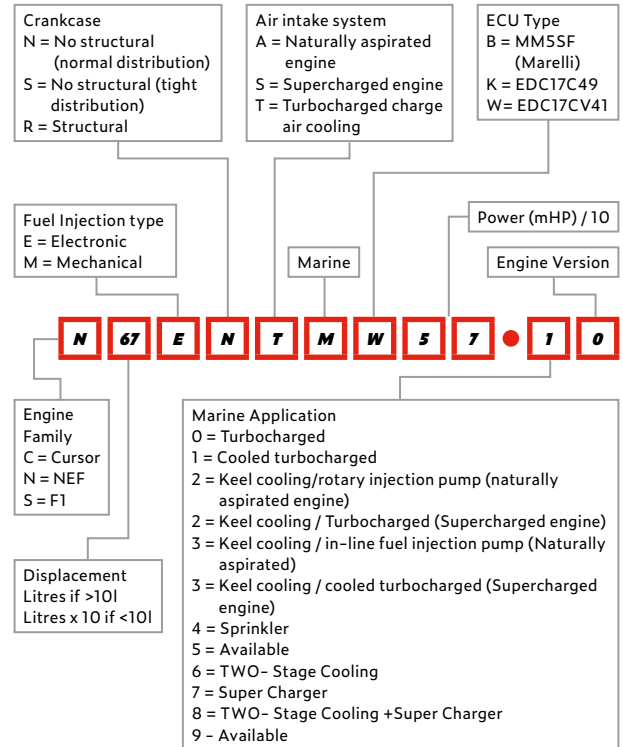



Engines Specifications

Engine model	Rating	kW	Hp	RPM	Dimensions*	Dry Weight
S30 230 E	A1	169	230	4000	780 x 775 x 753	330
N40 250 E	A1	184	250	2800	850 x 708 x 785	490
N40 250 E	A2	169	230	2800	850 x 708 x 785	490
N40 250 E	A2	110	150	2800	850 x 708 x 785	490
N40 250 E	A2	74	100	2800	850 x 708 x 785	490
N45 100	A1	74	100	2800	811 x 700 x 836	450
N60 400 E	A1	294	400	3000	1072 x 739 x 778	595
N60 400 E	A2	272	370	3000	1072 x 739 x 778	595
N67 150	A1	110	150	2800	1052 x 705 x 910	530
N67 220	A1	162	220	2800	1072 x 749 x 800	605
N67 280	A1	206	280	2800	1072 x 749 x 800	605
N67 450 N	A1	331	450	3000	1089 x 724 x 788	600
N67 450 N	A2	309	420	3000	1089 x 724 x 788	600
N67 550	A1	405	550	3200	1089 x 850 x 825	721
N67 550	A2	368	500	3200	1089 x 850 x 825	721
N67 570 EVO	A1	419	570	3000	1089 x 850 x 825	721
C90 620 E	A1	456	620	2530	1288 x 868 x 961	940
C90 620 E	A2	426	580	2530	1288 x 868 x 961	940
C90 620 E	A2	405	550	2530	1288 x 868 x 961	940
C90 650 E	A1	478	650	2530	1288 x 868 x 961	940
C90 650 EVO	A1	478	650	2530	1218 x 881 x 984	1014
C90 650 EVO	A2	460	625	2530	1218 x 881 x 984	1014
C13 825 E	A1	607	825	2400	1465 x 1000 x 1058	1395
C13 825 E	A2	522	750	2400	1465 x 1000 x 1058	1395
C16 1000	A2	735	1000	2300	1465 x 1136 x 1160	1690
C16 1000	A2	662	900	2300	1465 x 1136 x 1160	1690
C16 1000	A2	599	815	2300	1465 x 1136 x 1160	1690
C16 1000	A2	551	750	2300	1465 x 1136 x 1160	1690
C16 1000	A2	478	650	2300	1465 x 1136 x 1160	1690

* Dimensions can be changed according to engine options. (*W*H) Length at flywheel.
Millimetres



THE F1 SERIES





S30 230 E

Arrangement:	4 Cyl. in line
Total Displacement (L):	3,0
Maximum Power (kW (Hp) @ rpm):	169 (230) @ 4.000
Thermodynamic cycle:	Diesel 4 stroke
Air handling:	TCA
Valves per cylinder:	4
Cooling System:	liquid
Direction of Rotation (viewed facing flywheel):	CCW
Engine management:	electronic
Injection System:	CR

WEIGHT AND DIMENSIONS

Dimensions*	(L**xWxH) 780 x 775 x 753 mm
Dry Weight	330 Kg

* Dimensions can be changed according to engine options

** Length at flywheel

Rating	KW	Hp	Rpm	g/kWh	IMO II	RCD II
A1	169	230	4000	252	•	•

Air Handling

TCA Turbocharged with
aftercooler
TC Turbocharged
NA Naturally Aspirated

Injection System

M Mechanical
CR Common Rail
EUI Electronic Unit Injector



THE NEF SERIES



N40 250 E

Arrangement:	4 Cyl. in line
Total Displacement (L):	3,9
Maximum Power (kW (Hp) @ rpm):	184 (250) @ 2.800
Thermodynamic cycle:	Diesel 4 stroke
Air handling:	TCA
Valves per cylinder:	4
Cooling System:	liquid
Direction of Rotation (viewed facing flywheel):	CCW
Engine management:	electronic
Injection System:	CR

WEIGHT AND DIMENSIONS

Dimensions*	(L**xWxH) 850 x 708 x 785 mm
Dry Weight	490 Kg

* Dimensions can be changed according to engine options

** Length at flywheel

Rating	KW	Hp	Rpm	g/kWh	IMO II	RCD II
A1	184	250	2800	217.4	●	●
A2	169	230	2800	218	-	●
A2	110	150	2800	263	-	●
A2	74	100	2800	297	-	●

Air Handling

TCA	Turbocharged with aftercooler
TC	Turbocharged
NA	Naturally Aspirated

Injection System

M	Mechanical
CR	Common Rail
EUI	Electronic Unit Injector



N45 100

Arrangement:	4 Cyl. in line
Total Displacement (L):	4,5
Maximum Power (kW (Hp) @ rpm):	73.5 (100) @ 2.800
Thermodynamic cycle:	Diesel 4 stroke
Air handling:	NA
Valves per cylinder:	2
Cooling System:	liquid
Direction of Rotation (viewed facing flywheel):	CCW
Engine management:	mechanical
Injection System:	M

WEIGHT AND DIMENSIONS

Dimensions*	(L**xWxH) 811 x 700 x 836 mm
Dry Weight	450 Kg

* Dimensions can be changed according to engine options

** Length at flywheel

Rating	KW	Hp	Rpm	g/kWh @RPM
A1	73.5	100	2800	230 @1800

Air Handling

TCA	Turbocharged with aftercooler
TC	Turbocharged
NA	Naturally Aspirated

Injection System

M	Mechanical
CR	Common Rail
EUI	Electronic Unit Injector



N60 400

Arrangement:	6 Cyl. in line
Total Displacement (L):	5,9
Maximum Power (kW (Hp) @ rpm):	294 (400) @ 3.000
Thermodynamic cycle:	Diesel 4 stroke
Air handling:	TAA
Valves per cylinder:	4
Cooling System:	liquid
Direction of Rotation (viewed facing flywheel):	CCW
Engine management:	electronic
Injection System:	CR

WEIGHT AND DIMENSIONS

Dimensions*	(L**xWxH)	1072 x 739 x 778 mm
Dry Weight		595 Kg

* Dimensions can be changed according to engine options

** Length at flywheel

Rating	KW	HP	Rpm	g/kWh	IMO II	RCD II
A1	294	400	3000	231	●	●
A2	272	370	3000	227	●	●

Air Handling

TCA Turbocharged with aftercooler
 TC Turbocharged
 NA Naturally Aspirated

Injection System

M Mechanical
 CR Common Rail
 EUJ Electronic Unit Injector



N67 150

Arrangement:	6 Cyl. in line
Total Displacement (L):	6,7
Maximum Power (kW (Hp) @ rpm):	110 (150) @ 2.800
Thermodynamic cycle:	Diesel 4 stroke
Air handling:	NA
Valves per cylinder:	2
Cooling System:	liquid
Direction of Rotation (viewed facing flywheel):	CCW
Engine management:	mechanical
Injection System:	M

WEIGHT AND DIMENSIONS

Dimensions*	(L**xWxH)	1052 x 705 x 910 mm
Dry Weight		530 Kg

* Dimensions can be changed according to engine options

** Length at flywheel

Rating	KW	HP	Rpm	g/kWh @RPM
A1	110	150	2800	230 @1800

Air Handling

TCA Turbocharged with aftercooler
 TC Turbocharged
 NA Naturally Aspirated

Injection System

M Mechanical
 CR Common Rail
 EUJ Electronic Unit Injector



N67 220

Arrangement:	6 Cyl. in line
Total Displacement (L):	6,7
Maximum Power (kW (Hp) @ rpm):	162 (220) @ 2.800
Thermodynamic cycle:	Diesel 4 stroke
Air handling:	TC
Valves per cylinder:	2
Cooling System:	liquid
Direction of Rotation (viewed facing flywheel):	CCW
Engine management:	mechanical
Injection System:	M

WEIGHT AND DIMENSIONS

Dimensions*	(L**xWxH)	1072 x 749 x 800 mm
Dry Weight		605 Kg

* Dimensions can be changed according to engine options

** Length at flywheel

Rating	KW	HP	Rpm	g/kWh @RPM
A1	162	220	2800	213 @1500

Air Handling

TCA Turbocharged with
aftercooler
TC Turbocharged
NA Naturally Aspirated

Injection System

M Mechanical
CR Common Rail
EUI Electronic Unit Injector



N67 280

Arrangement:	6 Cyl. in line
Total Displacement (L):	6,7
Maximum Power (kW (Hp) @ rpm):	206 (280) @ 2.800
Thermodynamic cycle:	Diesel 4 stroke
Air handling:	TCA
Valves per cylinder:	2
Cooling System:	liquid
Direction of Rotation (viewed facing flywheel):	CCW
Engine management:	mechanical
Injection System:	M

WEIGHT AND DIMENSIONS

Dimensions*	(L**xWxH)	1072 x 749 x 800 mm
Dry Weight		605 Kg

* Dimensions can be changed according to engine options

** Length at flywheel

Rating	KW	HP	Rpm	g/kWh @RPM	IMO II
A1	206	280	2800	214 @2000	●

Air Handling

TCA Turbocharged with
aftercooler
TC Turbocharged
NA Naturally Aspirated

Injection System

M Mechanical
CR Common Rail
EUI Electronic Unit Injector



N67 450 N

Arrangement:	6 Cyl. in line
Total Displacement (L):	6,7
Maximum Power (kW (Hp) @ rpm):	331 (450) @ 3.000
Thermodynamic cycle:	Diesel 4 stroke
Air handling:	TCA
Valves per cylinder:	4
Cooling System:	liquid
Direction of Rotation (viewed facing flywheel):	CCW
Engine management:	electronic
Injection System:	CR

WEIGHT AND DIMENSIONS

Dimensions*	(L**xWxH)	1089 x 724 x 788 mm
Dry Weight		600 Kg

* Dimensions can be changed according to engine options

** Length at flywheel

Rating	KW	Hp	Rpm	g/kWh	IMO II	RCD II	EPA Tier3
A1	331	450	3000	231	●	●	●
A2	309	420	3000	228	●	●	-

Air Handling

TCA Turbocharged with aftercooler
 TC Turbocharged
 NA Naturally Aspirated

Injection System

M Mechanical
 CR Common Rail
 EUJ Electronic Unit Injector



N67 550

Arrangement:	6 Cyl. in line
Total Displacement (L):	6,7
Maximum Power (kW (Hp) @ rpm):	404 (550) @ 3.200
Thermodynamic cycle:	Diesel 4 stroke
Air handling:	TCA
Valves per cylinder:	4
Cooling System:	liquid
Direction of Rotation (viewed facing flywheel):	CCW
Engine management:	electronic
Injection System:	CR

WEIGHT AND DIMENSIONS

Dimensions*	(L**xWxH)	1089 x 850 x 825 mm
Dry Weight		721 Kg

* Dimensions can be changed according to engine options

** Length at flywheel

Rating	KW	Hp	Rpm	g/kWh	IMO II	RCD II	EPA Tier3
A1	404	550	3200	230	●	●	●
A2	368	500	3200	227	●	●	●

Air Handling

TCA Turbocharged with aftercooler
 TC Turbocharged
 NA Naturally Aspirated

Injection System

M Mechanical
 CR Common Rail
 EUJ Electronic Unit Injector



N67 570 EVO

Arrangement:	6 Cyl. in line
Total Displacement (L):	6,7
Maximum Power (kW (Hp) @ rpm):	419 (570) @ 3.000
Thermodynamic cycle:	Diesel 4 stroke
Air handling:	TCA
Valves per cylinder:	4
Cooling System:	liquid
Direction of Rotation (viewed facing flywheel):	CCW
Engine management:	electronic
Injection System:	CR

WEIGHT AND DIMENSIONS

Dimensions*	(L**xWxH)	1089 x 847 x 825 mm
Dry Weight		721 Kg

* Dimensions can be changed according to engine options

** Length at flywheel

Rating	KW	HP	Rpm	g/kWh	IMO II	RCD II	EPA Tier3
A1	419	570	3000	223	●	●	●

Air Handling

TCA Turbocharged with
aftercooler
TC Turbocharged
NA Naturally Aspirated

Injection System

M Mechanical
CR Common Rail
EUI Electronic Unit Injector



THE CURSOR SERIES



C90 620 E

Arrangement:	6 Cyl. in line
Total Displacement (L):	8,7
Maximum Power (kW (Hp) @ rpm):	456 (620) @ 2.530
Thermodynamic cycle:	Diesel 4 stroke
Air handling:	TCA
Valves per cylinder:	4
Cooling System:	liquid
Direction of Rotation (viewed facing flywheel):	CCW
Engine management:	electronic
Injection System:	CR

WEIGHT AND DIMENSIONS

Dimensions*	(L**xWxH)	1288 x 823 x 961 mm
Dry Weight		940 Kg

* Dimensions can be changed according to engine options

** Length at flywheel

Rating	KW	HP	Rpm	g/kWh	IMO II	RCD II	EPA Tier3
A1	456	620	2530	228.5	●	●	●
A2	426	580	2530	226	●	●	-
A2	405	550	2530	224.6	●	●	-

Air Handling

TCA Turbocharged with aftercooler
 TC Turbocharged
 NA Naturally Aspirated

Injection System

M Mechanical
 CR Common Rail
 EUl Electronic Unit Injector



C90 650 E

Arrangement:	6 Cyl. in line
Total Displacement (L):	8,7
Maximum Power (kW (Hp) @ rpm):	478 (650) @ 2.530
Thermodynamic cycle:	Diesel 4 stroke
Air handling:	TCA
Valves per cylinder:	4
Cooling System:	liquid
Direction of Rotation (viewed facing flywheel):	CCW
Engine management:	electronic
Injection System:	CR

WEIGHT AND DIMENSIONS

Dimensions*	(L**xWxH)	1288 x 823 x 961 mm
Dry Weight		940 Kg

* Dimensions can be changed according to engine options

** Length at flywheel

Rating	KW	HP	Rpm	g/kWh	IMO II	RCD II	EPA Tier3
A1	478	650	2530	228.5	●	●	●

Air Handling

TCA Turbocharged with aftercooler
 TC Turbocharged
 NA Naturally Aspirated

Injection System

M Mechanical
 CR Common Rail
 EUl Electronic Unit Injector



C90 650 EVO

Arrangement:	6 Cyl. in line
Total Displacement (L):	8,7
Maximum Power (kW (Hp) @ rpm):	478 (650) @ 2.530
Thermodynamic cycle:	Diesel 4 stroke
Air handling:	TCA
Valves per cylinder:	4
Cooling System:	liquid
Direction of Rotation (viewed facing flywheel):	CCW
Engine management:	electronic
Injection System:	CR

WEIGHT AND DIMENSIONS

Dimensions*	(L**xWxH)	1218 x 881 x 984 mm
Dry Weight		1014 Kg

* Dimensions can be changed according to engine options

** Length at flywheel

Rating	KW	Hp	Rpm	g/kWh	IMO II	RCD II	EPA Tier3
A1	478	650	2530	228.5	●	●	●
A2	460	625	2530	218	●	●	●

Air Handling

TCA Turbocharged with aftercooler
 TC Turbocharged
 NA Naturally Aspirated

Injection System

M Mechanical
 CR Common Rail
 EUl Electronic Unit Injector



C13 825 E

Arrangement:	6 Cyl. in line
Total Displacement (L):	12,9
Maximum Power (kW (Hp) @ rpm):	607 (825) @ 2.400
Thermodynamic cycle:	Diesel 4 stroke
Air handling:	TCA
Valves per cylinder:	4
Cooling System:	liquid
Direction of Rotation (viewed facing flywheel):	CCW
Engine management:	electronic
Injection System:	EUI

WEIGHT AND DIMENSIONS

Dimensions*	(L**xWxH)	1465 x 1000 x 1058 mm
Dry Weight		1395 Kg

* Dimensions can be changed according to engine options

** Length at flywheel

Rating	KW	Hp	Rpm	g/kWh	IMO II	RCD II
A1	607	825	2400	229.1	●	●
A2	552	750	2400	227.5	●	●

Air Handling

TCA Turbocharged with aftercooler
 TC Turbocharged
 NA Naturally Aspirated

Injection System

M Mechanical
 CR Common Rail
 EUl Electronic Unit Injector



C16 1000

Arrangement:	6 Cyl. in line
Total Displacement (L):	15,9
Maximum Power (kW (Hp) @ rpm):	735 (1000) @ 2.300
Thermodynamic cycle:	Diesel 4 stroke
Air handling:	TCA
Valves per cylinder:	4
Cooling System:	liquid
Direction of Rotation (viewed facing flywheel):	CCW
Engine management:	electronic
Injection System:	CR

WEIGHT AND DIMENSIONS

Dimensions* (L**xWxH)	1465 x 1136 x 1160 mm
Dry Weight	1690 Kg

* Dimensions can be changed according to engine options

** Length at flywheel

Rating	KW	HP	Rpm	g/kWh	IMO II	RCD II	EPA Tier3
A2	735	1000	2300	229	●	●	●
A2	662	900	2300	229	●	●	●
A2	599	815	2300	232	●	●	●
A2	551	750	2300	233	●	●	●
A2	478	650	2300	235	●	●	●

Air Handling

TCA Turbocharged with aftercooler

TC Turbocharged

NA Naturally Aspirated

Injection System

M Mechanical

CR Common Rail

EUI Electronic Unit Injector



RED HORIZON



Red Horizon

FPT Industrial, in collaboration with two leading companies, NAVICO (SIMRAD) and ZF, is proud to introduce RED HORIZON: a "Premium" integrated system for engine/navigation monitoring and controls with state-of-the-art technologies.

Monitoring Systems

FPT 7" Premium Display Key Features

Based on SIMRAD technology, the FPT Premium 7" is a compact display, perfect for small-medium sportboats, dayboats, and center-consoles. Dedicated to monitoring engine data, the panel offers the chance to extend the display options on a wide range of navigation functions.

- Widescreen display with LED backlight
- Easy to use tablet-style touchscreen controls
- Wide range of engine data, alarm monitoring and options such as the on-board entertainment system control
- Multi Function Display option: fully featured chartplotter (C-MAP charts) with built-in GPS receiver, and monitoring of additional options*, like radar, echosounder and autopilot
- Built-in wireless connectivity to a compatible smartphone or tablet, giving access to charts, radar and other functions from anywhere on board
- In addition to the 7-inch display the 9" and the 12" sizes complete the FPT Premium Display series

* Devices provided by NAVICO (SIMRAD) network

FPT 16" Premium MFD Key Features

Based on SIMRAD technology, the FPT Premium 16" high-performance MFD (Multi Function Display) is perfect for medium-sized motor yachts, offshore cruisers and sportfishing boats.

- Ultra-bright, full HD Multi Function Display system that monitors FPT engine data and main navigation functions (chartplotter, radar, sonar, autopilot and much more) with technology that provides a clear view in all lighting conditions and ultra-wide viewing angles
- Easy and intuitive touchscreen access
- Integrated quad-core processor for ultimate performance
- Split screen option with up to 6 panels
- Connect with smartphones, tablets, and internet hotspots
- Easy construction of your perfect system, combining multiple displays and a choice of optional accessories (sonar*, radar*, chart card reader*, autopilot*, GPS receiver and much more)
- Built-in wireless connectivity mirrors your display to a compatible smartphone or tablet, giving you instant access to charts, radar and other functionality from anywhere on board.

Electronic Control Systems

Electronic Controls - FPT Premium Control

Key Features

FPT uses ZF electronic propulsion control systems at the cutting edge of electronics technology, specifically matched for FPT engines

- The Premium electronic control is a powerful system that integrates the latest CAN bus technology in an innovative and compact control head, with an ergonomic lever and a user-friendly display where all functions can be easily selected
- With an easy plug-in installation, the “Premium” control provides complete governance of navigation offering bottom set up, start interlock, emergency reversal protection, engine synchronisation and optional features for docking or trolling
- Up to six control stations.

Manoeuvring Systems - FPT Premium Joystick

Key Features

Controlling engines, transmissions and thrusters simultaneously, the “Premium joystick” provides unbeatable ease of vessel control during manoeuvres. The “Premium joystick” offers the following main advantages: vessel control at low speed, easy manoeuvring in tight spaces, vessel positioning against wind and current

Main technical features:

- 12/24 V DC system
- CAN based joystick station, with one push button to take control and select functions
- CE certified Manoeuvring Control Unit
- CAN connection to “Premium control” processor
- Options:
 - Hold Position
 - Interface with ZF Steer Command
 - Up to six control stations

Marine Engine Options

FPT Industrial offer a whole range of options to complete your engine:

- Suspensions (Silent block)
- Electrical system 12V/24V
- Insulated poles electrical system
- Uprated Alternators
- Front PTO
- Instruments kit
- Digital and analog panels
- Water cooled or dry exhaust pipes
- Gearboxes
- Emission and Propulsion engine certification with several classification societies
- NMEA2000 Converter
- Remote Control lever
- Red Horizon

Please contact your local distributor on our locator at fptindustrial.com to get more information.

FPT Industrial Global Network


**FPT INDUSTRIAL
GLOBAL NETWORK**

**70+
DEALERS**

**800+
SERVICE POINTS**

**CONNECTED
WE BOOST CHANGE**

24/7
00 800 00 378 000

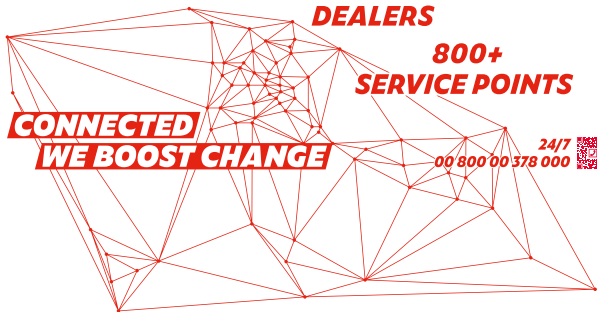

FPT Industrial S.p.A.

Via Puglia 15, 10156 Torino, Italy

fptindustrial.com

marketing@fptindustrial.com